


PRO400S Patch Cord

Cat.6 U/FTP AWG27/7 LSOH/FRNC

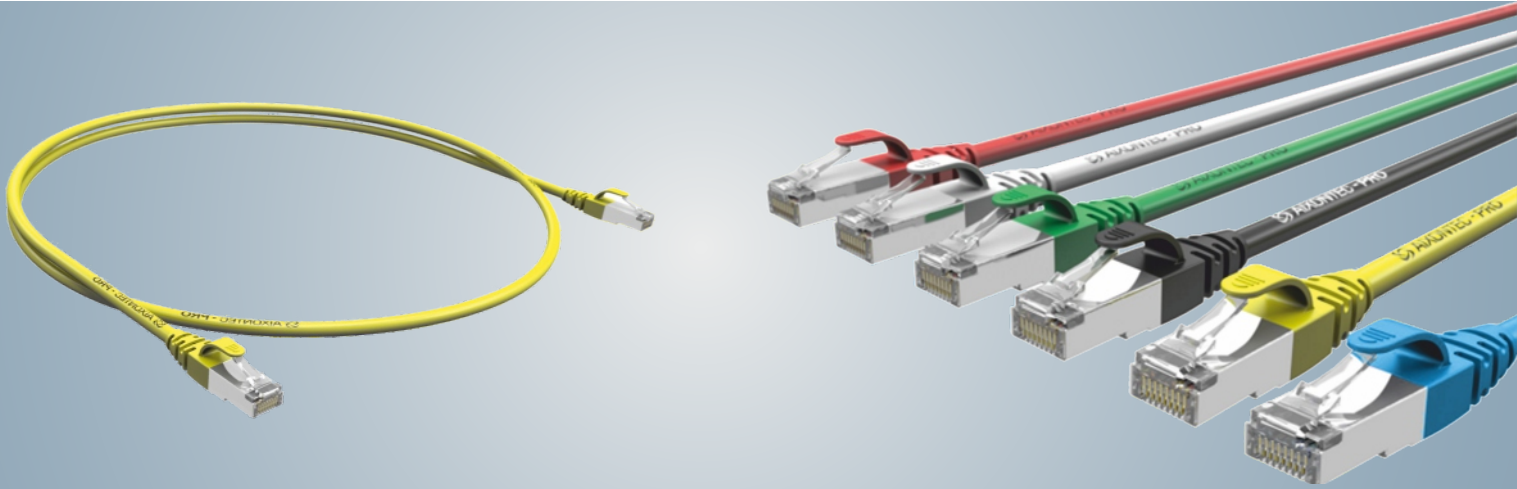


PRODUCT DESCRIPTION

AIXONTEC® PRO 400S is a Cat.6 RJ45 shielded patch cord made of bare copper stranded cable and shielded plugs. The AIXONTEC® Slim boots with flexible latch protection makes this patch cords ideally suitable for High-Density cabling. The high quality stranded cable with U/FTP construction has a foil pair shielding (PiMF) and is tested up to a frequency of 400 MhZ. The 400S patch cords are available in 6 different cable and boot colors. Any combination besides standard colors between boot and cable color are possible to support an easy and quick service or port identification. The AIXONTEC® PRO 400S Patch cords are most suitable for Voice, Video and Data-Applications of class E/ 250MHz up to 1 Gigabit Ethernet. Available in many different colors and lengths.

TECHNICAL INFORMATION

Electrical values	Cat.6 (ISO/IEC) Class E
Norms	ISO/IEC 11801 / EN 50173
Flame retardancy	IEC 60332-1/ IEC 60754-2 / IEC 61034
Cable construction	Cat.6 4x2xAWG27/7 U/FTP pair shielding (PiMF)
Plug	Rj45 Cat.6 shielded 30µ gold plated contacts
Pin assigment	1:1,Crossover on request
Cable diameter	5,5 mm
Outer sheath	LSOH/FRNC in black color, halogen free, low smoke density and flame retardant.
Boot	AIXONTEC® Slim boots in grey/red/ yellow/green/ blue/black



ORDERING INFORMATION

Type number	20111
Item description	PRO400S Cat.6 U/FTP AWG27 LSOH/FRNC Other lengths and colors available on request.

Länge (m)	Black	Grey	Red	Yellow	Green	Blue
0,5	20111.BK0,5	20111.GR0,5	20111.RD0,5	20111.YL0,5	20111.GN0,5	20111.BL0,5
1,0	20111.BK1,0	20111.GR1,0	20111.RD1,0	20111.YL1,0	20111.GR1,0	20111.BL1,0
2,0	20111.BK2,0	20111.GR2,0	20111.RD2,0	20111.YL2,0	20111.GN2,0	20111.BL2,0
3,0	20111.BK3,0	20111.GR3,0	20111.RD3,0	20111.YL3,0	20111.GN3,0	20111.BL3,0
5,0	20111.BK5,0	20111.GR5,0	20111.RD5,0	20111.YL5,0	20111.GN5,0	20111.BL5,0
7,5	20111.BK7,5	20111.GR7,5	20111.RD7,5	20111.YL7,5	20111.GN7,5	20111.BL7,5
10,0	20111.BK10,0	20111.GR10,0	20111.RD10,0	20111.YL10,0	20111.GN10,0	20111.BL10,0
12,0	20111.BK12,0	20111.GR12,0	20111.RD12,0	20111.YL12,0	20111.GN12,0	20111.BL12,0
15,0	20111.BK15,0	20111.GR15,0	20111.RD15,0	20111.YL15,0	20111.GN15,0	20111.BL15,0