


PRO500S Patch Cord

Cat.6A U/UTP AWG24/7 LSOH

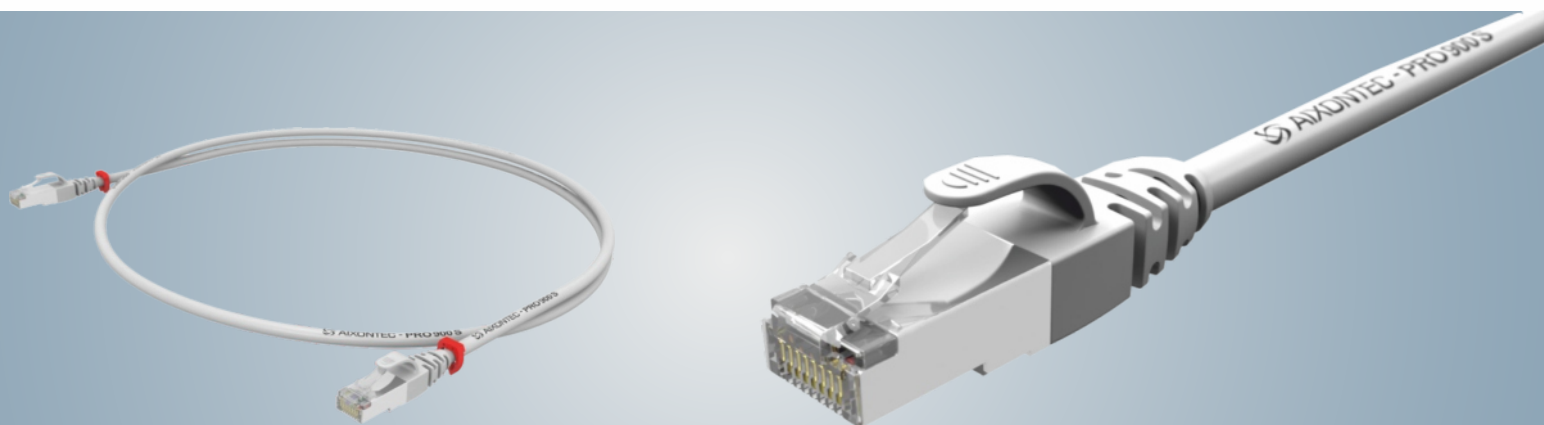


PRODUCT DESCRIPTION

AIXONTEC® PRO500S unshielded Cat.6A RJ45 Patch cord with slim boot and latch protection. The slim and flexible boot provides an easy handling for High- Density cabling. The AIXONTEC® PRO 500S Patch cords are most suitable for Voice, Video and Data- Applications of class E/ 250MHz up to 1 Gigabit Ethernet. Available in grey, for efficient port assingment we recommend to use our color coding rings.

TECNICAL INFORMATION

| | |
|--------------------|---|
| Electrical Values | Cat.6A (EIA/TIA) |
| Norms | EIA/TIA |
| Flame retardancy | IEC 60332-1-2/ IEC 60332-3-24 |
| Cable construction | Cat.6A U/UTP 4x2xAWG27/7 |
| Plug | Rj45 Cat.6A unshielded, gold plated contacts |
| Pin assignment | 1:1,Crossover on request |
| Cable diameter | 6,0 mm |
| Outer shealth | LSOH in grey, halogen free and flame retardant |
| Boot | AIXONTEC® Slim boot (schlim & flexible) with latch protection in grey |



ORDERING INFORMATION

| | |
|------------------|--|
| Type number | 20127 |
| Item description | PRO500S Cat.6A U/UTP AWG27 LSOH <i>Other lengths, colors, and colored boots on request.</i> |

ACCESSOIRES (OPTIONALLY)

| | |
|-------|---|
| 21201 | Color coding rings (VPE: 100 pcs, 10 of each color) |
|-------|---|



| Length (m) | Grey |
|------------|--------------|
| 0,5 | 20127.GR0,5 |
| 1,0 | 20127.GR1,0 |
| 1,5 | 20127.GR1,5 |
| 2,0 | 20127.GR2,0 |
| 3,0 | 20127.GR3,0 |
| 4,0 | 20127.GR4,0 |
| 5,0 | 20127.GR5,0 |
| 8,0 | 20127.GR8,0 |
| 10,0 | 20127.GR10,0 |
| 12,0 | 20127.GR12,0 |
| 15,0 | 20127.GR15,0 |
| 20,0 | 20127.GR20,0 |
| 25,0 | 20127.GR25,0 |
| 30,0 | 20127.GR30,0 |
| 35,0 | 20127.GR35,0 |
| 50,0 | 20127.GR50,0 |