


Keystone RJ45-Jack C6AU4 horizontal

Cat.6A unshielded

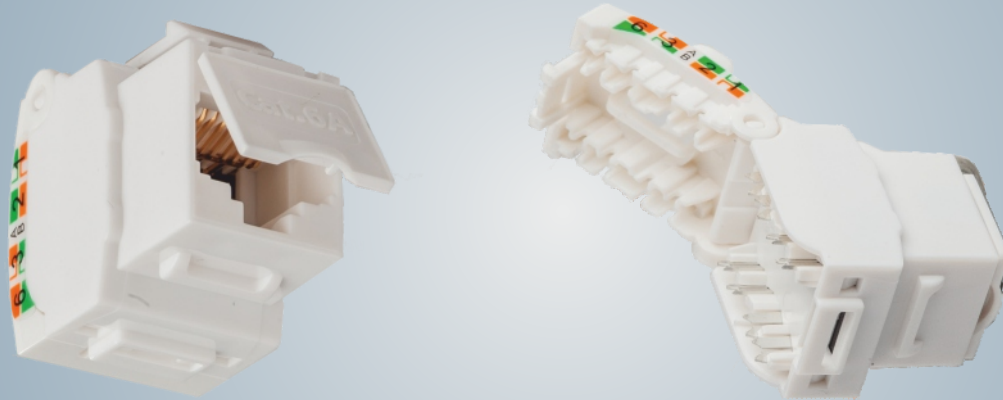

PRODUCT DESCRIPTION

Unshielded Cat. 6A Keystone RJ45-Jack with plastic housing. Most suitable for Voice, Video and Data-Applications of class E_A/500MHz up to 10 GbE. With integrated dust cover also suitable for industrial applications. Easy and fast assembly with the support of an ergonomic crimping tool.

DATA PERFORMANCE


Class E_A/Cat.6A 500MHz 10GbE

VALID NORMS

EIA/TIA 568 C.2 Cat.6A
EN 50173
ISO/IEC 11801 Edt. 2.2

CONSTRUCTION

Measurements	2,4x1,7x2,7 cm (HxWxD)
Housing	PC/ABS (UL-94V0)
Cable acceptance	AWG 23-24, solid wire
PCB	FR4, UL-94V0
Contacts	50μ gold plated
Tension	30≤N
Insertion Cycle	min. 750
Assembly cycle	max. 10
Isolation resistance	500mΩ
Contact resistance	≤20mΩ
Max. ampacity	1,5 Amps
Operation Temperature	-40° bis 70°C

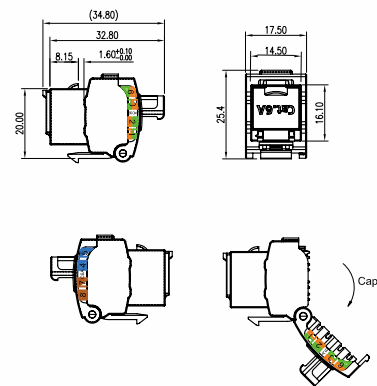

ACCESSOIRES (OPTIONALLY)

- Metallic crimping tool horizontal (rust-free steel with PVC grip)
- Ergonomic plastic crimping tool horizontal (PC/ABS UL-94V0)

21003



21001



ORDERING INFORMATION

Type number	20313
Item description	C6AU4 Keystone Module Cat.6A unshielded horizontal